

Cable extension with 3 sockets 2P+E, 16A 250V~.
With light switch. 1,5 m of cable.

Cable extension with 3 sockets 2P+E, 16A 250V~. With light switch. 1,5 m of cable. MAX. 3680 W. Cable H05VV-F 3G1,5mm². With fixing holes to the wall. Common applications: Indoor domestic / tertiary environment (Interior of home, offices, shops, etc.)



Features

Type	Multiple base
No. of bases	3
Basic characteristics	2P+E, 16A 250V~
Cable length	1,5 m.
Maximum power	3.680 W
Light switch	Yes
Cable	Yes
Cable Features	H05VV-F 3G1,5mm²
Possibility of using KIT-DIN35	Yes
Wall fixing holes	Yes

Technical data

Protection Degree (IP)	IP20
Fire resistance (GWT)	850°C
Heat resistance (Ball pressure)	125°C
Ambient operating temperature	-5°C ; +60°C

Regulations

CE marking	Yes
According to Regulations UNE/EN	UNE-20315-1-1:2017; UNE-20315-1-2:2017

According to REBT	Yes
Intertek GS certificate	Yes
According to European Directive 2014/35 / EU. Low voltage directive	Yes


Sustainability

According to European Directive 2011/65/UE (RoHS)	Yes (Complies with UNE EN 50581)
According to European Directive 2012/19/UE (RAEE2)	Yes

Logistics and packaging

Unit EAN code	8423220063723
EAN code container	8423220063723
EAN code packaging	18423220063720
Units packaging	1
Units carton	20
Pallet Units	1000
Packaging Measurements cm	40x0,1x14
Packaging Measures cm	37,5x20x30
Unit weight (gr)	350
Container Weight (Kg)	0,37
Packaging Weight (Kg)	7.78
Tariff code	85366990

Sketch

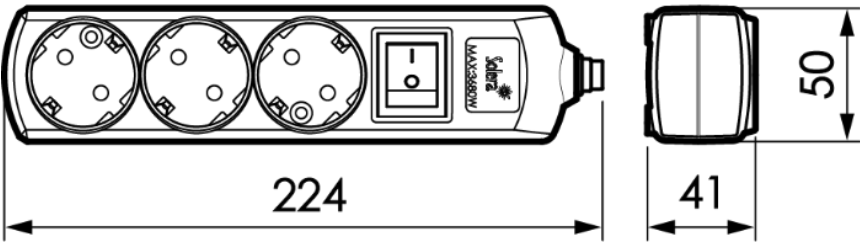



Documentation and downloads



[Assembly instructions \(0.67MB\)](#)



[Certificate \(0.3MB\)](#)